
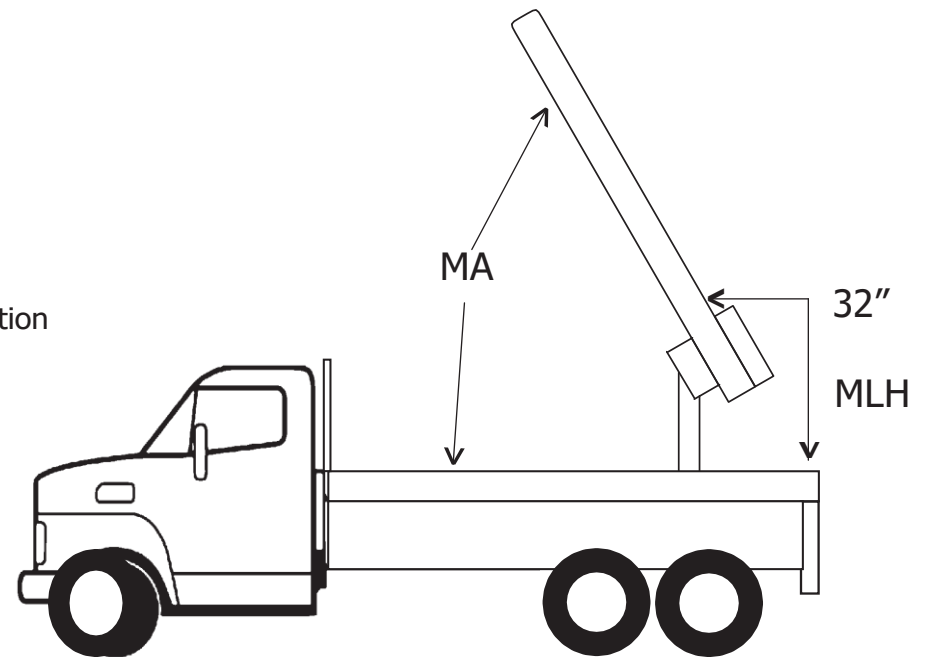


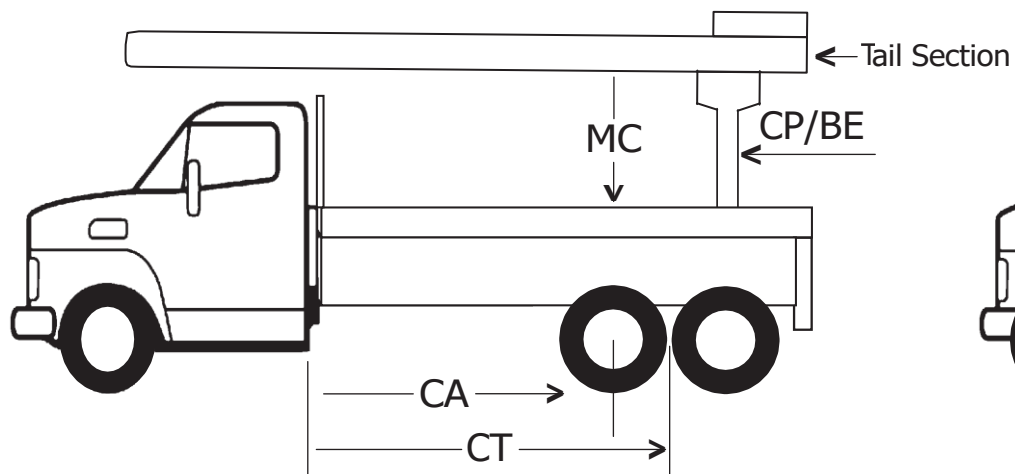

MC = Maximum Clearance
 CP/BE = Center of Post to Back Edge of tail section
 CA = Cab to Axle
 CT = Cab to Trunion (center of tandem axle)

MA = Maximum Angle
 MLH = Minimum Load Height

Ultimate:

CONVEYOR LENGTH	30' thru 40'
MINIMUM LOAD HEIGHT (MLH)	**
MAXIMUM BED CLEARANCE (MC)	**
MAXIMUM CONVEYOR ANGLE (MA)	55°
CENTER OF POST TO BACK EDGE OF TAIL SECTION (CP / BE)	52.25"
POST ROTATION	360°

Deluxe:

CONVEYOR LENGTH	24' thru 32'
HYDRAULIC FIXED POST	
MINIMUM LOAD HEIGHT (MLH)	**
MAXIMUM BED CLEARANCE (MC)	**
MAXIMUM CONVEYOR ANGLE (MA)	**
CENTER OF POST TO BACK EDGE OF TAIL SECTION (CP/BE)	42.5"
POST ROTATION	360°
OPTIONAL HYDRAULIC TELESCOPING POST	
MINIMUM LOAD HEIGHT (MLH)	**
MAXIMUM BED CLEARANCE (MC)	**
MAXIMUM CONVEYOR ANGLE (MA)	**
CENTER OF POST TO BACK EDGE OF TAIL SECTION (CP/BE)	42.5"
POST ROTATION	360°